

## N 70, CANOPY COOKER HOOD, 86 CM, BLACK D86NAC1S0B



### Optional accessories

|           |                                          |
|-----------|------------------------------------------|
| Z5135X1   | Standard odor filter (replacement)       |
| Z5135X3   | Standard recirculation kit               |
| Z51ITD1X1 | Long Life recirculation kit external     |
| Z51ITP0X0 | Long Life odor filter (replacement)      |
| Z51IXB1X6 | Clean Air Plus odor filter (replacement) |
| Z51IXC1X6 | Clean Air Plus recirc. kit external      |

Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Hidden Design: Seamlessly integrate your hood in a flush fitted cupboard design.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: our optimised motor guarantees a quiet cooking experience.
- ✓ LED Lighting: clear illumination while you cook.
- ✓ Intensive Setting: the powerful way to beat intense steam during cooking, with automatic revert.

### Features

#### Technical Data

|                                               |                              |
|-----------------------------------------------|------------------------------|
| Typology:                                     | Built-in/Built-under         |
| Length electrical supply cord:                | 150.0 cm                     |
| Required niche size for installation (HxWxD): | 345mm x 676.0mm x 264mm mm   |
| Height of the appliance:                      | 345 mm                       |
| Minimum distance above an electric hob:       | 500 mm                       |
| Minimum distance above a gas hob:             | 650 mm                       |
| Net weight:                                   | 10.0 kg                      |
| Type of control:                              | Electronic                   |
| Number of speed settings:                     | 3-stages + intensive setting |
| Maximum output air extraction:                | 600 m³/h                     |
| Boost position output recirculating:          | 700 m³/h                     |
| Maximum output recirculating air:             | 580 m³/h                     |
| Boost position air extraction:                | 745 m³/h                     |
| Maximum Air flow:                             | 600 m³/h                     |
| Number of lights:                             | 2                            |
| Noise level:                                  | 61 dB(A) re 1pW              |
| Diameter of air outlet:                       | 120 / 150 mm                 |
| Grease filter material:                       | Washable aluminium           |
| EAN code:                                     | 4242004287216                |
| Connection Rating:                            | 252 W                        |
| Fuse protection:                              | 3 A                          |
| Voltage:                                      | 220-240 V                    |
| Frequency:                                    | 50; 60 Hz                    |
| Plug type:                                    | GB plug                      |
| Installation typology:                        | Built-in                     |



## N 70, CANOPY COOKER HOOD, 86 CM, BLACK D86NAC1S0B

### Features

#### Design:

- Canopy hood
- Installation: Cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted extraction and recirculation
- For recirculated extraction various recirculation kits are available as optional accessories.

#### Core Features:

- 2 x 1W LED lights
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 2 metal grease filter(s).

#### Comfort Features:

- Soft touch control with LED display
- 3 speeds plus intensive
- Automatic reset from intensive to normal setting after 6 min

#### Cleaning Comfort:

- metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

#### Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 285 m<sup>3</sup>/h; noise level 45 dB (A) re1pW Speed 2: extraction rate 410 m<sup>3</sup>/h; noise level 51 dB (A) re1pW Speed 3: extraction rate 600 m<sup>3</sup>/h; noise level 61 dB (A) re1pW Intensive 1: extraction rate 745 m<sup>3</sup>/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 50.1 kWh/year\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: D\*

#### Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 200 m<sup>3</sup>/h; noise level 59 dB (A) re1pW Speed 2: extraction rate 370 m<sup>3</sup>/h; noise level 71 dB (A) re1pW Speed 3: extraction rate 440 m<sup>3</sup>/h ; noise level 73 dB (A) re1pW Intensive Speed 1: extraction rate 460 m<sup>3</sup>/h; noise level 74 dB (A) re1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air plus recirculation kit, for chimless installation (available as optional accessory): Speed 1: extraction rate 270 m<sup>3</sup>/h ; noise level 51 dB (A) re1pW Speed 2: extraction rate 390 m<sup>3</sup>/h ; noise level 71 dB (A) re1pW Speed 3: extraction rate 580 m<sup>3</sup>/h ; noise level 69 dB (A) re1pW Intensive Speed 1: extraction rate 700 m<sup>3</sup>/h ; noise level 74 dB (A) re1pW

#### Technical Information and Sustainability:

- Consumption data:

- Power rating: 252 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Environmentally friendly packaging
- Available odour filter as regenerative Long Life filter with 10 years lifetime


#### Planning and Installation Information:

- Dimensions (HxWxD): 345 x 860 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 860 x 282 mm
- Built-in dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Back-pressure flap: Yes


*N 70, CANOPY COOKER HOOD, 86 CM, BLACK  
D86NAC1S0B*

Dimensioned drawings


Measurements in mm

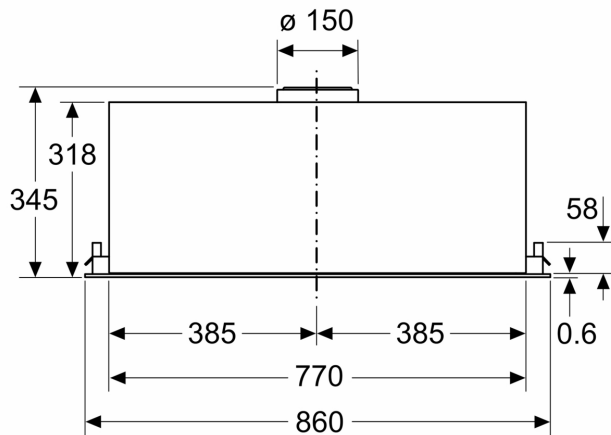


Measurements in mm

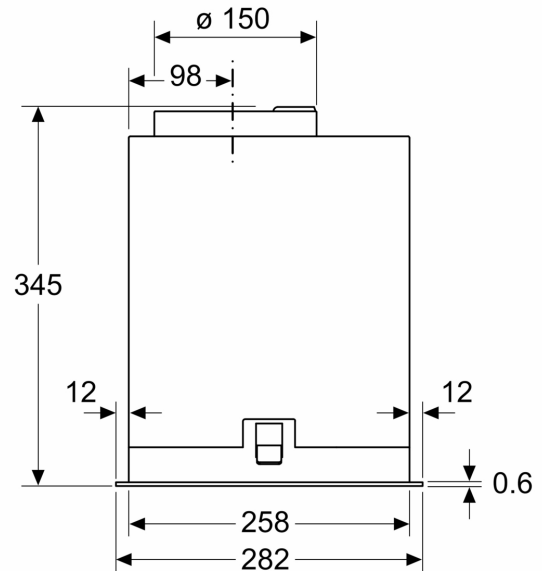

Measurements in mm

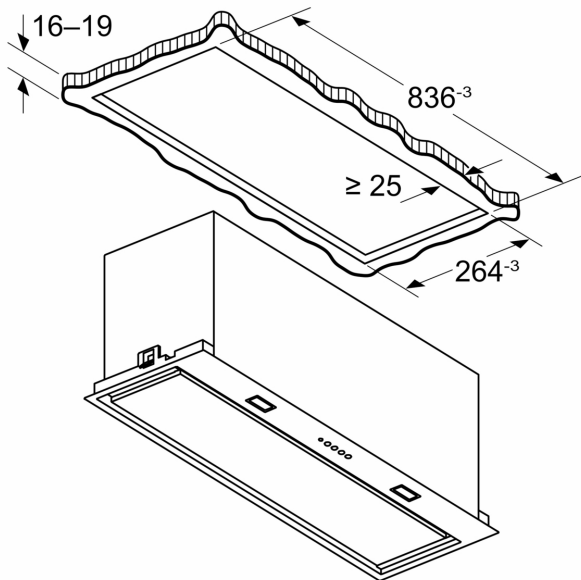

Measurements in mm

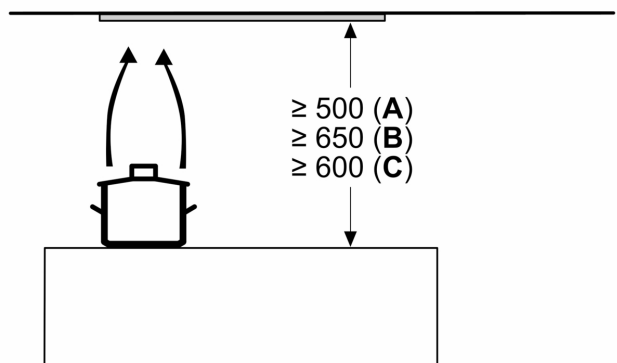

**A:** Electric

**B:** Gas - from upper edge of pan support

**C:** Electric - for Australia and New Zealand