


iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

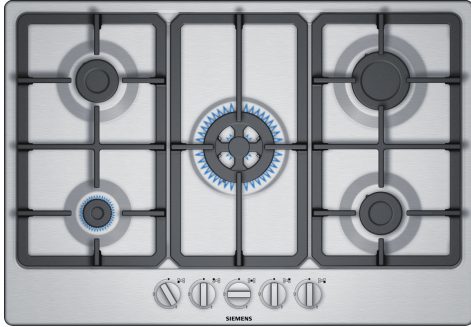

Optional accessories

HZ298114	Small pot support
HZ298105	Simmer plate
HZ298108	Wok ring

The gas hob with front-mounted controls.

- ✓ This wok burner with 3.3 kW of power is ideal for a wide variety of foods, even in large quantities.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The sword knob combines highest ease of use with modern design.
- ✓ The uniquely beautiful stainless-steel surface design.

Features

Technical Data

Product name/family: gas hob w
integrated controls
Built-in / Free-standing: Built-in
Source of energy: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Min. required niche size for installation (HxWxD):45 x 560-562 x
480-492 mm
Width of the appliance: 750 mm
Dimensions: 53 x 750 x 520 mm
Dimensions of the packed product (HxWxD): ... 145 x 793 x 597 mm
Weight: 12.9 kg
Gross weight: 14.5 kg
Residual heat indicator: without
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 150.0 cm
EAN code:4242003830581
Gas connection rating: 10800 W
Fuse protection:3 A
Nominal power: 220-240 V
Frequency: 50; 60 Hz



iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

Features

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner gas hob including:
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 3.3 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 10.8 KW

iQ300, Gas hob, 75 cm, Stainless steel
EG7B5QB90

Dimensioned drawings

