

# IM-240DWNE-HC-23

# Cuber, Modular

Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C): 190



ICE TYPE: Medium cubes - 23







Cube Size: M-23

#### **ACCESSORIES INCLUDED**

Scoop, installation kit, ice chute

### **OPTIONAL ACCESSORIES**

4HC-H water filtration

## **CORRESPONDING WATER FILTERS**

4HC-H Twin Water Filter, 4HC Replacement Cartridge

## CORRESPONDING BIN(S)

B-340SA, F-1025-52S, F-600-42S, F-650-44S, F-950-48S

#### **CORRESPONDING TOP KITS**

TK-48 for B-340SA (optional, not required), TK-IMD2 for B-340SA

PRODUCT SERIES: IM ITEM NUMBER: M071-D110 COUNTRY OF ORIGIN: UK

Hoshizaki IM-240DWNE-HC-23 is a water cooled, modular and stackable ice maker producing up to 190 kg of cube ice per 24 hours. This model is compatible with our storage bins.

Hoshizaki recommends that the water-cooled condenser should be connected to a closed circuit recirculating type cooling systemutilizing a tower, water chiller or similar. Water make up should be via a ball valve/break tank arrangement. Whilst connecting a water-cooled condenser to a mains water (potable) supply will not affect the performance of the machine, it will most certainly cause high water use and waste of a valuable resource that is not recommended. It is likely that the connection of such units to the mains water supply may be a contravention of local water authority by-laws.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may be differ due to local installation conditions.

- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed Cell System helps produce compact, hard and geometrically perfect
- Closed water circuit for contamination protection
- Electronic controller
- System comes with a magnetic water pump that has no direct coupling, which prevents any leakage
- Stainless steel frame inside

#### WARRANTY PERIOD 2 Years on Parts & Labour

**EXTERIOR** Stainless steel AISI 430, Galvanized steel (Rear)

Refrigerant: R290 / Refrigerant (kg): 0.147 / CO2 equivalent (kg): 0.441

#### **OPERATING CONDITIONS**

Ambient Temp.: 1-40°C, Water Supply Temp.: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage ±6%

#### **CERTIFICATIONS**















# IM-240DWNE-HC-23



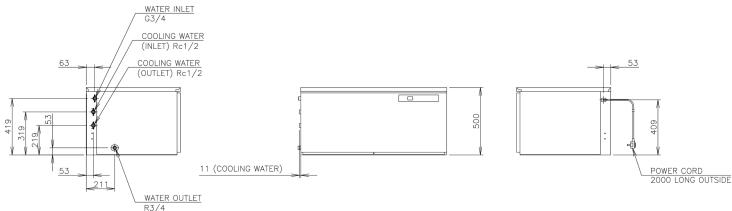

## **TECHNICAL SPECIFICATIONS**

<b>,</b>	Production Capacity (kg/24h) approx.	(kg/24h) approx.	(kg/24h) approx.	,	Electrical Circuit Breaker Protection	Electric Consumption (kW)	Cooling water at 21°C /max flow	Heat Rejection (AT 32°C, WT 21°C)		
	(AT 10°C, WT 10°C)	(AT 21°C WT 15°C)	(AT 32°C WT 21°C)		(A)		rate L/min	(kW)		
Water Cooled	190	170	166	1/220 - 240V/50Hz	5	0.835	0.88	1.73		

#### SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm), legs excluded	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Gross Weight, Packed (kg)	Volume Packed (m3)	
1084 x 700 x 500	78	1196 x 825 x 640	92	0.63	

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: This type of icemaker is on special order only. Please take longer lead times into consideration.



Hoshizaki Belgium Hoshizaki Danmark Hoshizaki Deutschland Hoshizaki France Hoshizaki Iberia Hoshizaki Italia Hoshizaki Middle East info@hoshizaki.be
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands Hoshizaki Norge Hoshizaki Sverige Hoshizaki UK Export countries Other countries info@hoshizaki.nl salg@hoshizaki.no orderSE@hoshizaki.dk uksales@hoshizaki.uk sales.ex@hoshizaki-europe.com sales.ex@hoshizaki-europe.com