


**iQ300, Canopy cooker hood, 75 cm, Silver metallic LB75565GB**

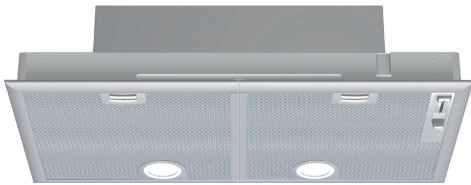

**Optional accessories**

LZ73050	Standard odor filter
LZ74020	Installation kit for canopy

The powerful canopy cooker hood is concealed in a unit above the hob.

✓ LED lights: for optimal visibility and ambience while cooking.

**Features**

**Technical Data**

Typology: ..... Built-in/Built-under  
 Length electrical supply cord: ..... 130.0 cm  
 Min. required niche size for installation (HxWxD): ..... 255mm x 700.0mm x 350mm mm  
 Minimum distance above an electric hob: ..... 650 mm  
 Minimum distance above a gas hob: ..... 650 mm  
 Weight: ..... 9.4 kg  
 Control panel: ..... mechanical  
 Number of speed settings: ..... 3-stages + intensive setting  
 Maximum output air extraction: ..... 379 m³/h  
 Boost position output recirculating: ..... 408.0 m³/h  
 Maximum output recirculating air: ..... 278 m³/h  
 Boost position air extraction: ..... 638 m³/h  
 Maximum Air flow: ..... 379 m³/h  
 Number of lights: ..... 2  
 Noise level: ..... 56 dB(A) re 1 pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: ..... Washable aluminium  
 EAN code: ..... 4242003838419  
 Connection Rating: ..... 206 W  
 Nominal power: ..... 220-240 V  
 Frequency: ..... 50 Hz  
 Plug type: ..... GB plug  
 Installation type: ..... Built-in



## iQ300, Canopy cooker hood, 75 cm, Silver metallic LB75565GB

### Features

#### Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 638 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB\*

#### Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

#### Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Mechanical

#### Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 379m<sup>3</sup>/h
- Intensive 638 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56dB(A) re 1 pW
- Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 410 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 730 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 730 x 380mm
- Built-in dimensions (HxWxD): 255 x 700 x 350 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 81.2 kWh/year\*

#### Optional accessories

- Recirculating kit LZ73050

\* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy cooker hood, 75 cm, Silver metallic  
LB75565GB

Dimensioned drawings

