


N 70, Gas hob, 60 cm, Stainless steel
T26CIP8N0

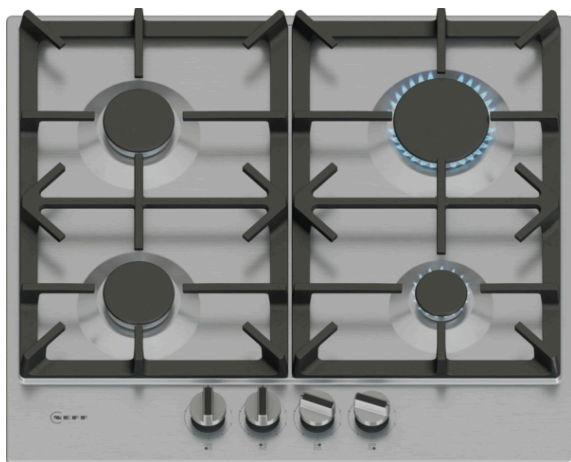

The gas hob with precise flame control, removable dials and pan supports that are suitable for dishwashers - for Comfort Clean.

- ✓ FlameSelect®: Gain precise control of your flame.
- ✓ Metallic Sword Dial: Precise and removable for easy cleaning.
- ✓ Cast Iron Pan Supports: For maximum stability and dishwasher cleaning.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.
- ✓ Biomethane Ready: Power your hob with renewable biomethane gas.

Features

Technical Data

Product name/family : gas hob w integrated controls

Built-in / Free-standing : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 4
Required niche size for installation (HxWxD) : 45 x 560-560 x 480-490 mm

Width of the appliance : 582 mm

Dimensions : 51.5x582x520 mm

Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm

Net weight : 10.7 kg

Gross weight : 11.8 kg

Residual heat indicator : Separate

Location of control panel : Front

Basic surface material : Stainless steel

Color of surface : Stainless steel

Length electrical supply cord : 100.0 cm

EAN code : 4242004284543

Gas connection rating : 7500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 50; 60 Hz

Optional accessories

| | |
|----------|---------------------------|
| Z1365WX0 | Wireless food thermometer |
| Z9404SE0 | 4 pieces Set |
| Z9406SE0 | 6 pieces Set |



4 242004 284543

N 70, Gas hob, 60 cm, Stainless steel
T26CIP8N0

Features

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet
- full metal

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 51.5 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 7.5 KW

T26CIP8N0

Dimensioned drawings

