




HOSHIZAKI

Premier F 60 C DR U Freezer



1/1 EN

PRODUCT SERIES: PREMIER
ITEM NUMBER: 183602030
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier F 60 C DR is a freezer suitable for the Euronorm 1/1 system (400 x 600 mm) with a net usable volume of 335 ltr. ranking C in energy efficiency class. It has a cabinet height of 2075mm and depth of 848mm without pedal door opener (depth of 920mm incl. pedal door opener).

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Clean free condenser (condenser filter not needed)
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

ACCESSORIES INCLUDED

4 grey shelves (400 x 600mm) Pedal door opener with overload protection

OPTIONAL ACCESSORIES

Set of legs 130-180mm
 Grey shelf with back guard
 Grey bottom shelf with back guard
 Stainless shelf with back guard
 Stainless bottom shelf with back guard
 Set of 4 stainless shelves with back guard
 Set of 2 rail for EN 1/1 cabinet U shape
 Master key

WARRANTY PERIOD
6 Years on Parts & Labour

EXTERIOR
Stainless steel AISI 304

INTERIOR
Stainless steel AISI 304

Refrigerant: R290 / Refrigerant (kg): 0.085 / CO2 equivalent (kg): 0.255

CERTIFICATIONS



Energy consumption (kWh/Year)	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index EEI
1,506	C	ISO 22041-2019	48.23



HOSHIZAKI

Premier F 60 C DR U



TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -30°C (Watt)	Climate Class	Sound Level – dB(A)
-25/-5°C	Shelf Euronorm 400x600mm Suitable for 1/1 EN system	480	335	230V, 50 Hz	520	376	S (max. ambient 40°C w/ 40% RH)	50


SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Weight, Packed (kg)	Volume Packed (m3)
610 x 848 x 2075 (including castors)	110	670 x 880 x 2150	120	1.26


Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

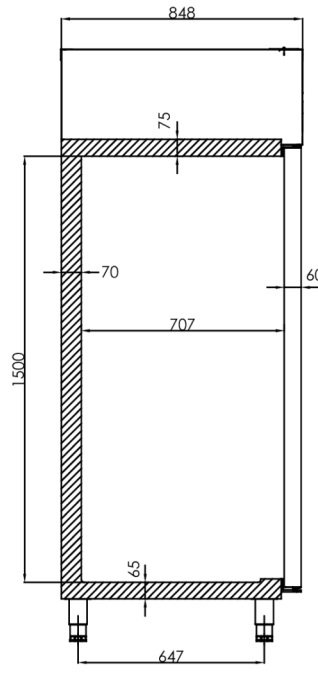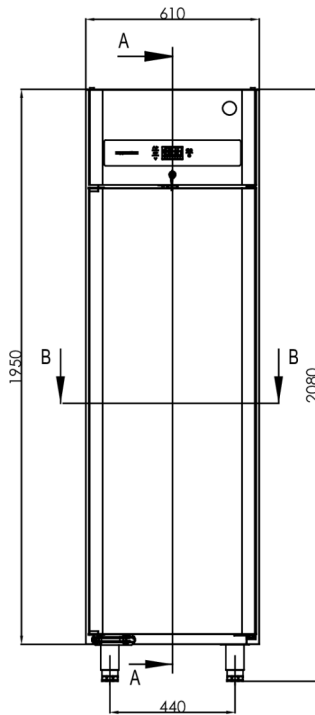

A-A



B-B



Hoshizaki Belgium info@hoshizaki.be
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk